

TILT-LOCK

Edge Fixed Spigot



82 SERIES

The extended mounting body positions glass outside the deck or balcony edge, preserving usable surface space.

2205 duplex stainless steel.

Friction-fit glass clamping.

No holes or cutouts in the glass.

Alignment and locking from one side.

Brushed Stainless shown

FEATURES & SPECIFICATIONS

Glass thickness	12-17.52 mm / nominal 1/2-11/16 in
-----------------	------------------------------------

Material	2205 Duplex Stainless Steel
----------	-----------------------------

Mounting	Edge / fascia mounting
----------	------------------------

Hardware / detail	Extended body with two fixing slots
-------------------	-------------------------------------

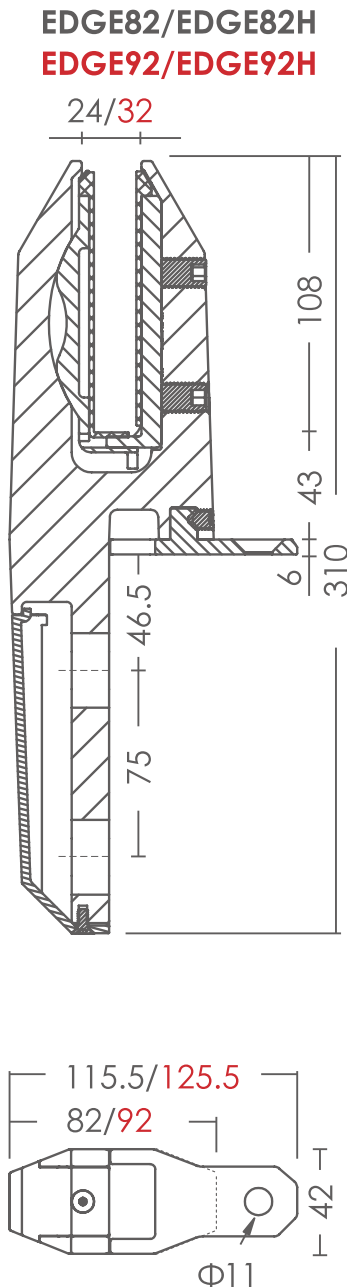
FINISHES

Brushed Stainless • Matte Black

Use the applicable project engineering and mounting specifications for installation. Drawing on page 2; dimensions in millimeters.

TILT-LOCK

Edge Fixed Spigot

DIMENSIONS: mm
NOT TO SCALE

MODEL DIMENSIONS

Overall height

310 mm

Body width

82 mm

Fixing centers

75 mm

Shared EDGE82 / EDGE82H drawing: black/gray dimensions apply to the 82 series. Red dimensions apply to EDGE92. The horizontal support bracket shown is the EDGE82H option; it is not included with EDGE82.

Drawing reproduced from the H&G manufacturer catalogue. Dimensions and geometry are retained from the source; use written dimensions, not measurements from the page.