

TILT-LOCK

Side Mounted Spigot



Brushed Stainless shown

FASCIA MOUNT

Fine-tune the glass forward or backward by up to 30 mm with the Tilt-Lock grub-screw adjustment.

Place the glass in the spigot, align it with a spirit level, then secure the locking screws. No holes in the glass are required.

FEATURES & SPECIFICATIONS

Material	2205 Stainless Steel
Mounting type	Fascia Mount
Glass thickness	1/2 in, 9/16 in, 5/8 in, 11/16 in
Adjustment	Forward / backward tilt up to 30 mm
Glass drilling	No holes required

FINISHES & PACKAGE DATA

Finish	Listed weight	Package size (in)
Brushed Stainless	1 lb	6.75 × 2.75 × 1
Polished Stainless	6.39 lb	6.75 × 4.625 × 2.75
Matte Black	6.39 lb	6.75 × 2.75 × 4.625

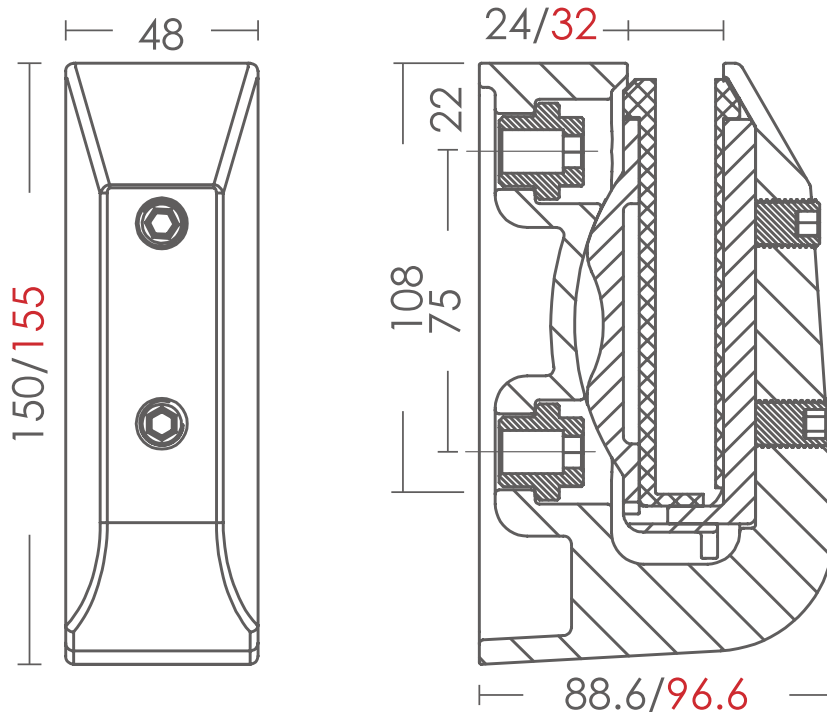
Weight and package data are listed by I.G.T. for each finish. Package size is not the installed spigot size.

TILT-LOCK

Side Mounted Spigot

DIMENSIONS: mm

NOT TO SCALE


TLSF82/TLSF96
MODEL DIMENSIONS

Overall height

150 mm

Overall depth

88.6 mm

Fixing centers

75 mm

This is the manufacturer's shared TLSF82 / TLSF96 drawing. Black/gray dimensions apply to TLSF82; red dimensions apply only to TLSF96.

Drawing reproduced from the H&G manufacturer catalogue. Dimensions and geometry are retained from the source; use written dimensions, not measurements from the page.