

# Majesty Series Pivot Hinge

## SHOWER HINGE TEMPLATE



### Top and Bottom Beveled Pivot Hinge Heavy Duty

SKU. MAG360-HD



**SEE TEMPLATE ON BACK**  
Refer to Dimensions Shown  
to Ensure Accuracy

#### Specifications:

**Glass Sizes:** 1/2" (12 mm) Tempered Glass Only  
**Construction:** Solid Brass  
**Closing Type:** Full Rotation and Self-Centering When Within 15 Degrees of Closed Position  
**Cutout Required:** Cutout No. SD20 or SD21  
**Includes:** Hinge, glazing gaskets, mounting screws, allen head/phillips head cover plate screws, and fabrication template.  
**Use:** Residential Bath and Commercial Hotel Applications

#### GASKET SPECIFICATIONS:



For 1/2" (12mm) Glass:  
 Use One Thin Gasket On One Side and  
 One Thick Gasket on the Other Side

#### GLASS INSTRUCTIONS:

Only use tempered safety glass. To prevent damage to the hinge finish. Installing these hinges should not be performed with power tools.

#### IMPORTANT INFORMATION:

The Sublime Series Hinge has a dual-degree pivot pin. It comes factory set at 90 degrees for everyday door-closing applications. For jobs requiring firmer support against the jamb or seal, the hinge pivot pin can also be adjusted in the field to add an additional 5 degrees of closing.

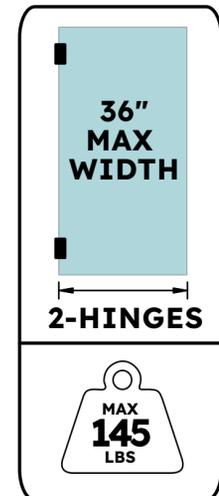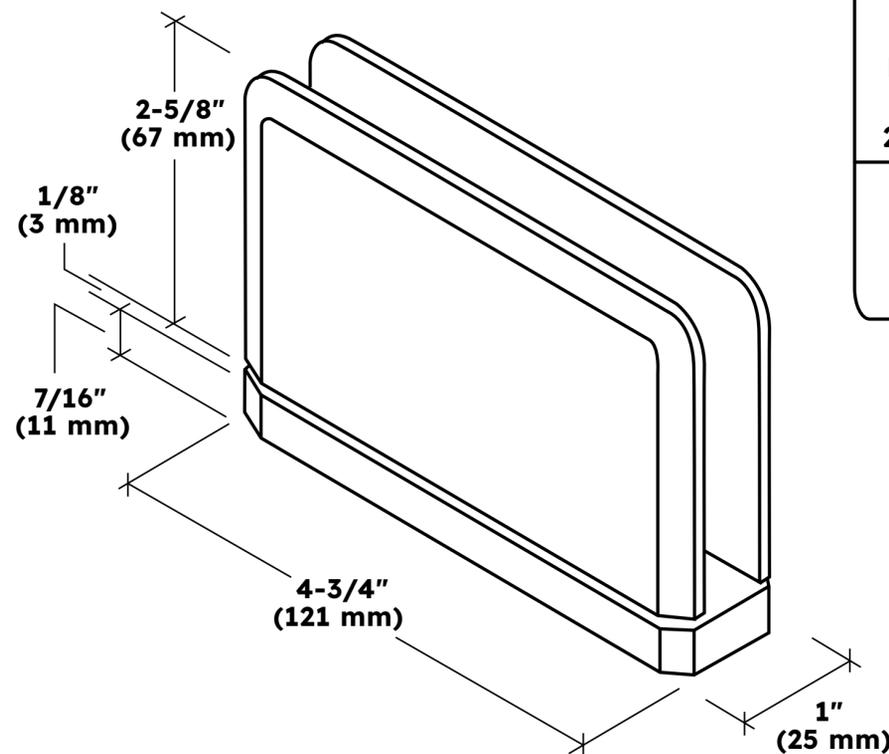

#### CARE & CLEANING GUIDELINES:

Keep the following recommendations in mind for maximum results when caring for your Glaze shower door hardware. Your shower door should be dried daily with a soft towel or cloth to ensure its original finish. Do not use harsh cleaners or chemicals on the hardware, as many of the components are coated with a clear lacquer that will become damaged beyond repair. Always test your cleaning solution in an inconspicuous area before wiping the entire hardware surface. Wipe surfaces with a soft, dampened cloth or sponge, and rinse with warm water immediately after applying the cleaning solution. Use only small amounts of a gentle, liquid cleaner. When cleaning hardware, don't use wire scrub brushes, or abrasive products.

#### MAINTENANCE:

All Glaze Hardware hinges are factory greased to ensure a quiet, hassle-free installation. Suppose there is any noticeable squeaking that occurs after installation. In that case, applying a few drops of (3 in 1) multi-purpose oil to the hinge at the nylon washer/pivot location is recommended. If, for some reason, the hinge is disassembled during maintenance, use a small amount of white lithium grease to lubricate the interior hinge components. The lubricant will penetrate the hinge crevices, reducing friction and cleaning grime and buildup. The use of spray lubricants is prohibited.

MAXIMUM DOOR CAPACITY	1/2" (12 mm) GLASS	
	WEIGHT	WIDTH
USING 2 HINGES	145 LBS. (66 kg)	36" (914 mm)
<b>Note: Do not exceed either maximum weight or width when choosing proper quantity of hinges</b>		

# Majesty Series Pivot Hinge

## SHOWER CLAMP TEMPLATE



### Top and Bottom Beveled Pivot Hinge


SKU. MAG360

Edge Pivot Option with 9/16" (14 mm) Top or Bottom Clearance



**USE ONLY  
MONOLITHIC  
TEMPERED GLASS**



Do not measure/scale drawing



Use dimensions shown

Cutout No. SD20

### EDGE PIVOT OPTION WITH 9/16" (14 MM) TOP OR BOTTOM CLEARANCE

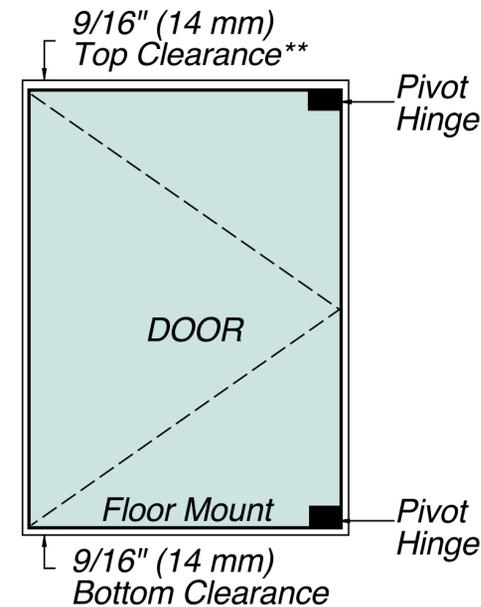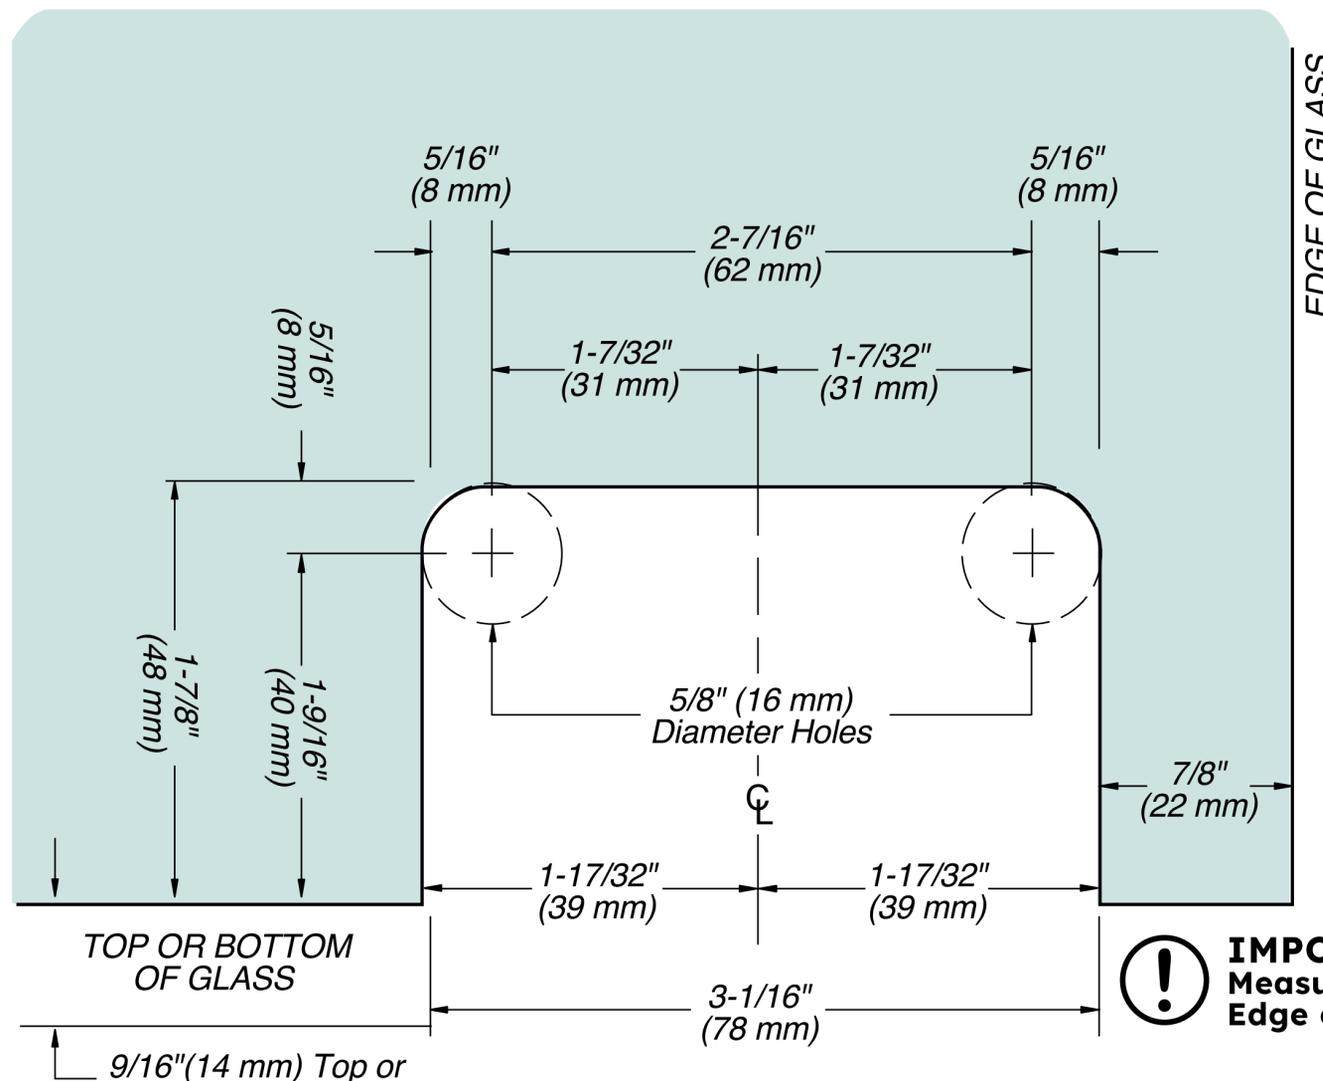

**IMPORTANT:**  
Measure from Finished  
Edge of Glass