



Beveled Glass to Glass mount transom heavy duty pivot

SKU. MAJGTG180T-HD

RECOMMENDATIONS:

Use only tempered safety glass.
Do not use power tools for tightening the hinge clamping plate.



MAINTENANCE GUIDELINES:

All Glaze Hardware hinges are factory greased to ensure a quiet, hassle-free installation. Suppose there is any noticeable squeaking that occurs after installation. In that case, applying a few drops of (3 in 1) multi-purpose oil to the hinge at the nylon washer/pivot location is recommended. If, for some reason, the hinge is disassembled during maintenance, use a small amount of white lithium grease to lubricate the interior hinge components. The lubricant will penetrate the hinge crevices, reducing friction and cleaning grime and buildup. The use of spray lubricants is prohibited.

SPECIFICATIONS:

Glass Sizes: 1/2" (12mm) thick tempered safety glass
Construction: Solid brass
Cut Out: Required
Includes: Gaskets, screws and template

Use of Gaskets:
For 1/2" (12mm) Glass: Use one thin gasket on each side

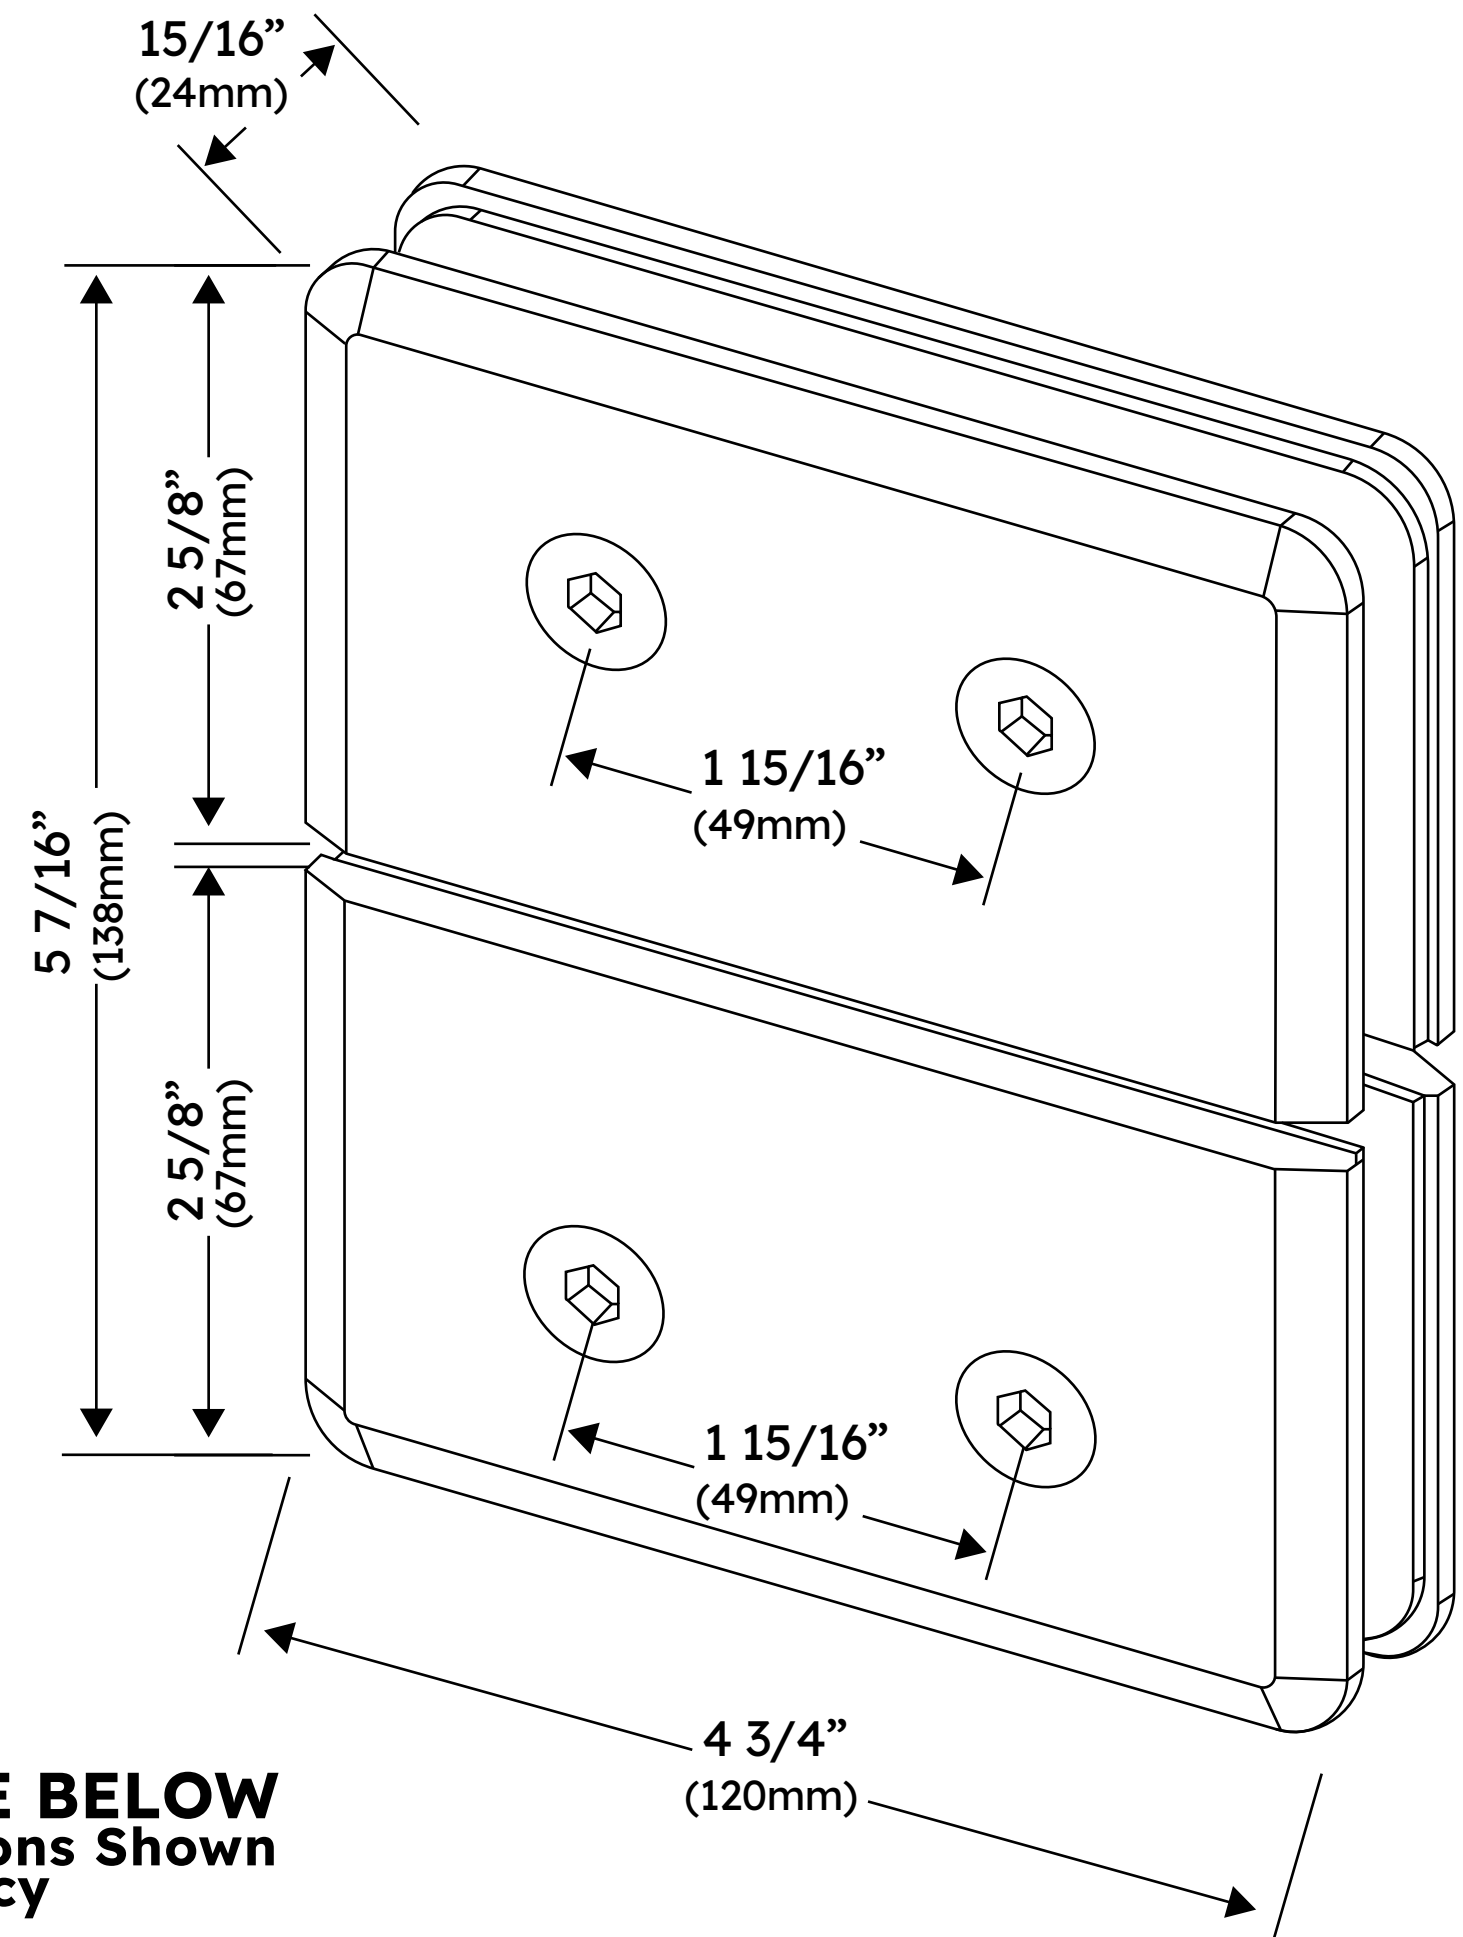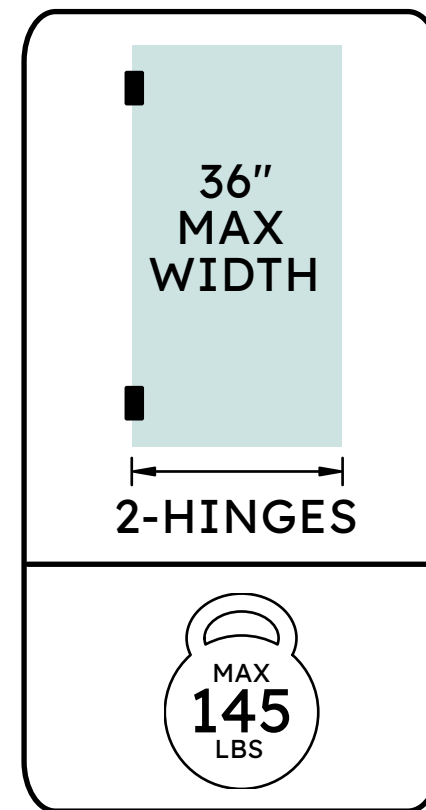

SEE TEMPLATE BELOW
Refer to Dimensions Shown to Ensure Accuracy

