

INSTALLATION INSTRUCTIONS

GLAZE REINA SYSTEM SERIES REINA SLIDING DOOR KIT.



Please keep this manual and the product code number for future reference and to order replacement parts if necessary

GENERAL INSTRUCTIONS

- Please read this manual carefully and thoroughly before proceeding.
- For your safety, it is recommended that you wear safety glasses at all times during installation.

INSTALLATION OVER CERAMIC TILES

- If you are installing the shower door over ceramic tiles, make sure that the
- tiles lay completely under the wall jamb.
- Use mildew resistant silicone to seal the gaps where the ceramic tiles meet the fixed panel.

NOTICE

- Caulking is not required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR








- Do not use scouring powder pads or sharp instruments on metal pieces or glass panels.
- To keep the panels and metal parts looking new, occasionally wipe them down with a mild soap diluted in water.
- We recommend wiping the glass panels with a squeegee after each use.



2 PEOPLE REQUIRED

Product specifications are subject to change without notice.

TOOLS REQUIRED

 SPIRIT LEVEL	 POWER DRILL	 PENCIL
 TAPE MEASURE	 SCREW DRIVER	 6mm&8mm(1/4" & 5/16") DRILL BITS
 MALLET	 SILICONE	 HACKSAW

* Use a 6mm(1/4") drill bit for ceramic when drilling into ceramic tiles.

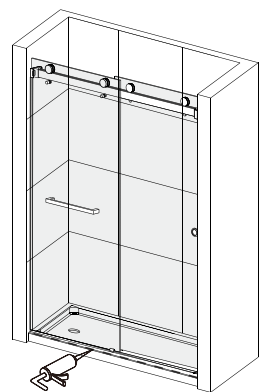
CHOOSE A CONFIGURATION

The 90° Slider represents a new approach to compact shower design, developed to meet the demands of modern spaces where efficiency, functionality, and aesthetics must work together seamlessly. Unlike traditional swing door systems, this solution operates on a sliding mechanism that opens at a 90-degree angle to the fixed panel, eliminating the need for additional clearance.


This system has been engineered to optimize usable space while maintaining a smooth and reliable operation. Its design improves accessibility and allows for greater flexibility in layout planning, making it ideal for residential and commercial applications where space constraints are a key consideration.

The 90° Slider combines clean lines with high-performance components, delivering a contemporary solution that aligns with current architectural and interior design standards. This manual provides the necessary information for proper installation, operation, and maintenance to ensure optimal performance and longevity of the system.

SECTION DIAGRAM




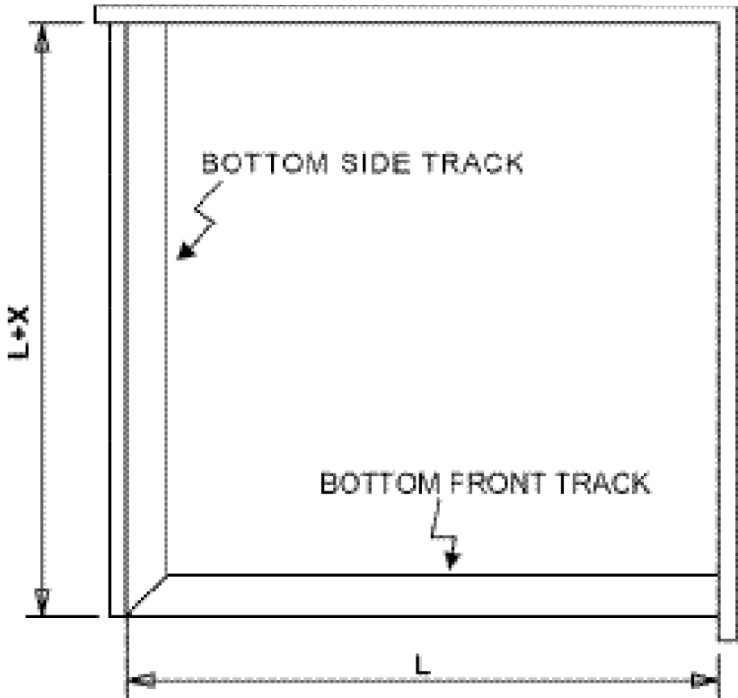*Wait 24 hours for the glass adhesive to cure.



☆ Bottom Front Track Length=L
Bottom Side Track Length=L+X

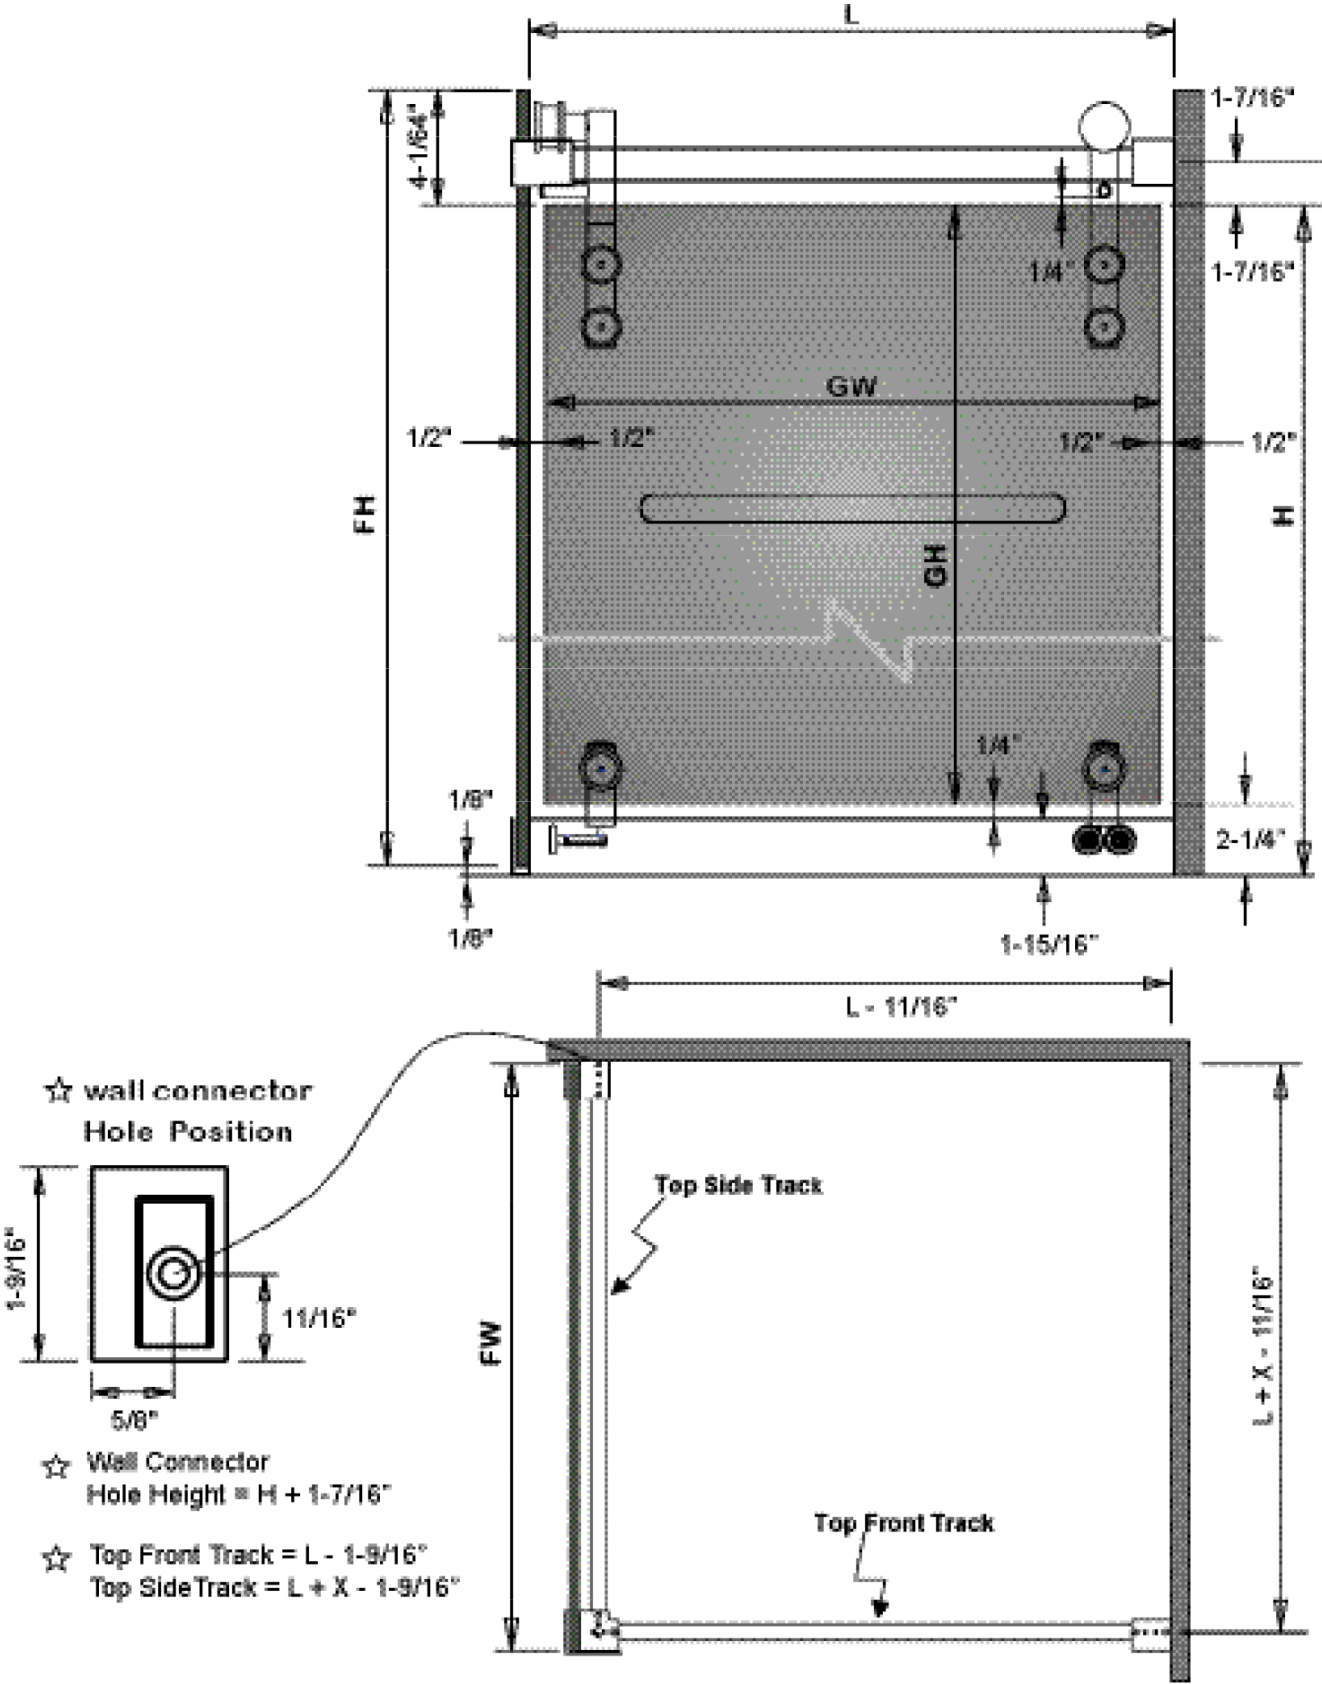SLIDING SYSTEM TEMPLATE



REINA DRILLING GUIDE

