



SKU. DYN90

LEFT SIDE 90° RETURN PANEL ADAPTOR GLASS FABRICATIONS

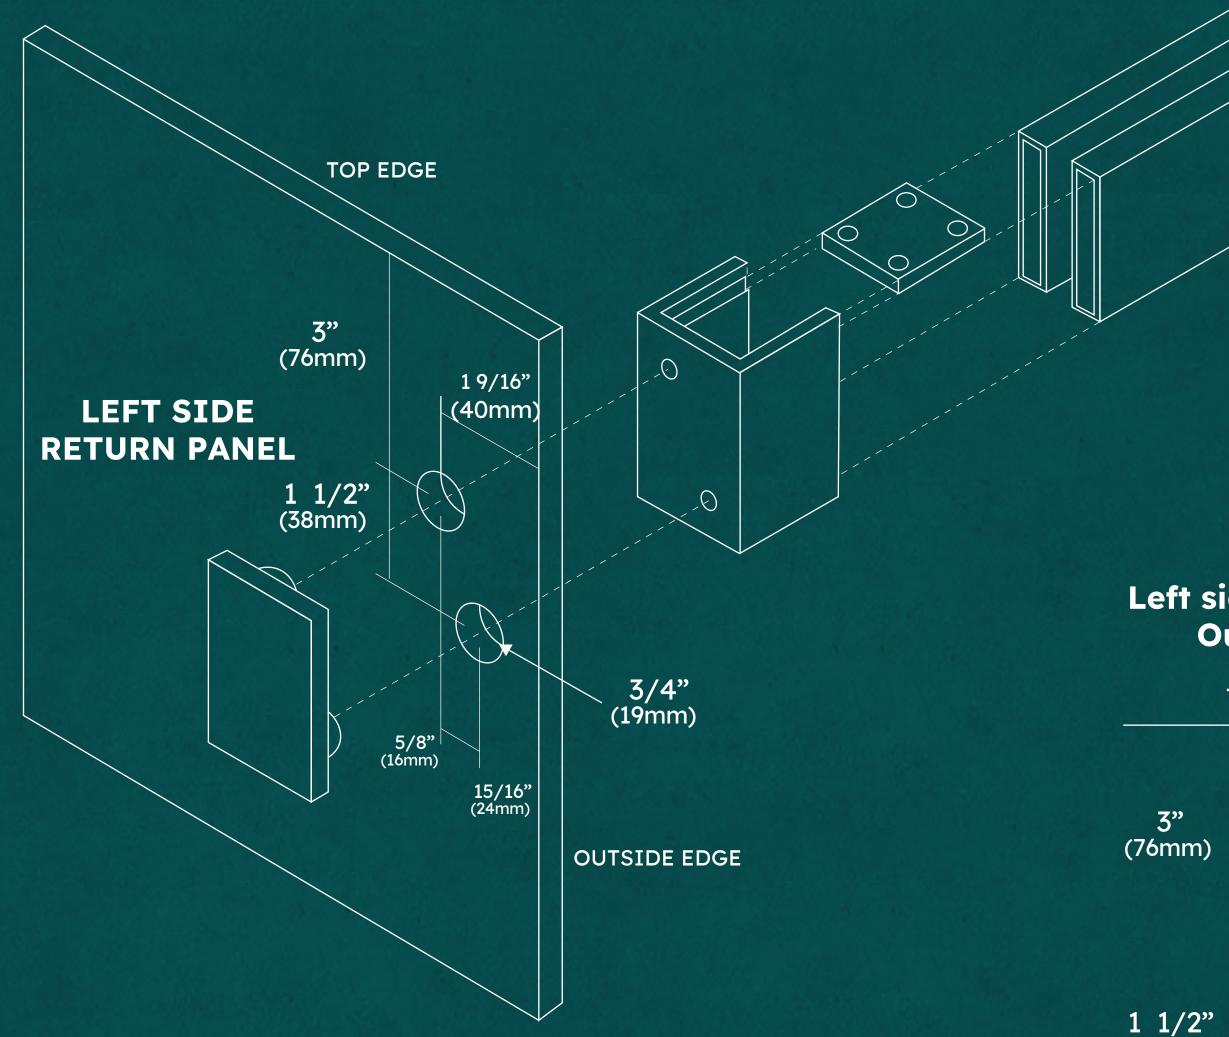

Left side return panel Outside View

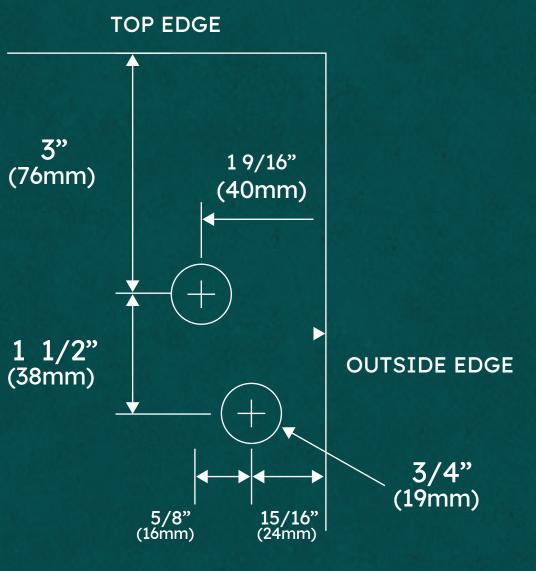



SKU. DYN90 RIGHT SIDE 90° RETURN PANEL ADAPTOR GLASS FABRICATIONS TOP EDGE (76mm) 1 9/16" RIGHT SIDE (40mm) **RETURN PANEL** 1 1/2" (38mm) Right side return panel **Outside View** 3/4" (19mm) TOP EDGE 5/8" (16mm) 15/16" (24mm) 3" 1 9/16" (76mm) OUTSIDE EDGE (40mm) 1 1/2" OUTSIDE EDGE (38mm) 3/4" (19mm) 15/16" (24mm) 5/8" (16mm)



SKU. DYN90 Parallel Double Frameless Glass Fabrications 1 1/2" (38mm) 3" (76mm) 1 9/16" (40mm) Return 3/4" (19mm) **Adaptor** 1 1/2" (38mm) Gasket Return **Panel** 9/14" 15/16" (16mm) (24mm) Gazquet Header Track Wall Mount



SKU. DYN90

Parallel Double Frameless Glass Fabrications

RECOMMENDATIONS:

Use only tempered safety glass.

Do not use power tools for tightening the hinge clamping plate.

MAINTENANCE GUIDELINES:

All Glaze Hardware hinges are factory greased to ensure a quiet, hassle-free installation. Suppose there is any noticeable squeaking that occurs after installation. In that case, applying a few drops of (3 in 1) multi-purpose oil to the hinge at the nylon washer/pivot location is recommended. If, for some reason, the hinge is disassembled during maintenance, use a small amount of white lithium grease to lubricate the interior hinge components. The lubricant will penetrate the hinge crevices, reducing friction and cleaning grime and buildup. The use of spray lubricants is prohibited.

SPECIFICATIONS:

Material: Header Track and Hardware, (Stainless Steel) Glass Thickness: 3/8" (10mm) (Glass is not Included) Glass Fabrication: Each Included Glass Roller requires one 3/4" Diameter Hole; Two 1/2' Diameter Holes are required for Each Towel Bar

Maximum Recommended Slider Weight: 90 lbs.

