

# Sublime Series 90° Hinge

## SHOWER HINGE TEMPLATE



SKU:SUB90

### RECOMMENDATIONS:

Use only tempered safety glass.  
Do not use power tools for tightening the hinge clamping plate



### MAINTENANCE GUIDELINES:

All Glaze Hardware hinges are factory greased to ensure a quiet, hassle-free installation. Suppose there is any noticeable squeaking that occurs after installation. In that case, applying a few drops of (3 in 1) multi-purpose oil to the hinge at the nylon washer/pivot location is recommended. If, for some reason, the hinge is disassembled during maintenance, use a small amount of white lithium grease to lubricate the interior hinge components. The lubricant will penetrate the hinge crevices, reducing friction and cleaning grime and buildup. The use of spray

### Specifications:

**Glass Sizes:** 3/8" (10mm) to 1/2" (12mm) thick tempered safety glass  
**Construction:** Solid brass  
**Cutout Required**  
**Includes:** Gaskets, screws and template

**Use of Gaskets:**  
For 3/8" (10mm) Glass: Use one thick gasket on each side  
For 1/2" (12mm) Glass: Use one thin gasket on each side

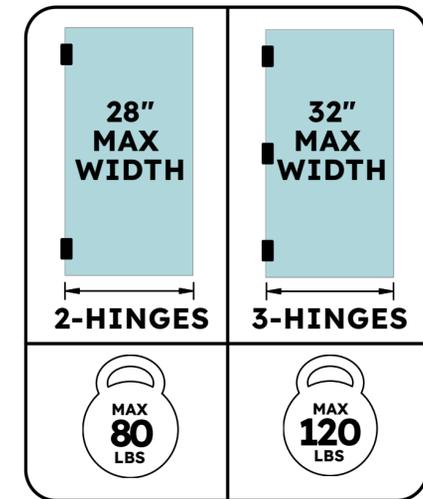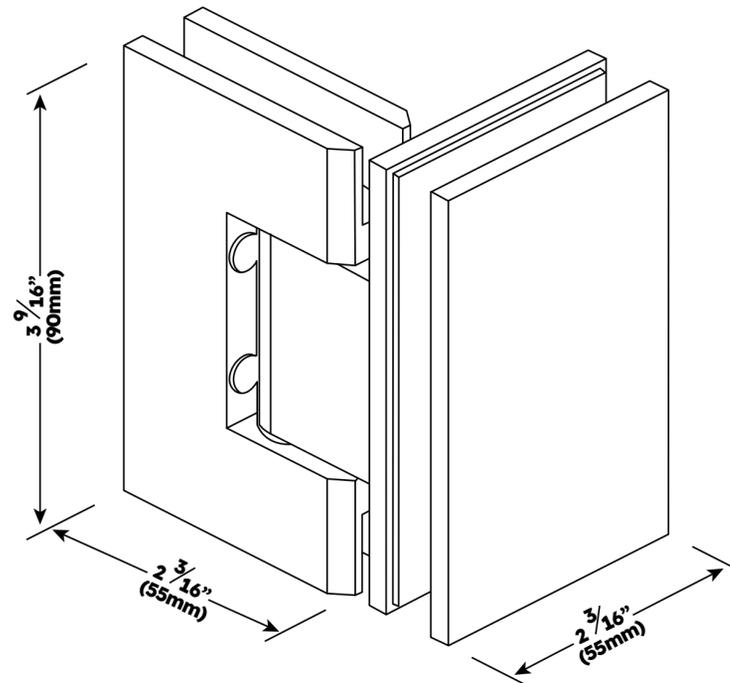

**SEE TEMPLATE BELLOW**  
Refer to Dimensions Shown to Ensure Accuracy

